



HAIDI

Lithium Iron Phosphate (LiFePO4) Battery


HD12.8-7.5(12.8V7.5AH)

Features of LiFePO4 Battery

- **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range:** -20°C~60°C.
- **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- **Increased Flexibility:** Modular design enables deployment of up to four batteries in series and up to ten batteries in parallel.



Physical Dimension

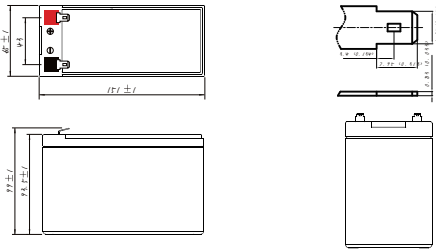

Application

- Electric vehicles, electric mobility
- Solar/wind energy storage system
- UPS, backup power
- Telecommunication
- Medical equipment
- Lighting


Specification

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	7.5Ah (C ₅ ,25°C)
	Energy	96Wh
	Internal Resistance	≤60mΩ
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode	0.2C to 14.6V, then 14.6V, charge current to 0.02C (CC/CV)
	Charger Current	4A
	Max. Charge Current	7.5A
	Charge Cut-off Voltage	15.6V±0.2V
Standard Discharge	Continuous Current	10A
	Max. Pulse Current	20A(<3s)
	Discharge Cut-off Voltage	8V
Environmental	Charge Temperature	0 °C to 45 °C (32F to 113F) @60±25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	0 °C to 40 °C (32F to 104F) @60±25% Relative Humidity
	Water Dust Resistance	IP56
Mechanical	Cell & Method	18650 4S5P
	Plastic Case	ABS
	Dimensions (in./mm.)	151*65*94mm (5.95"*2.56"*3.70")
	Weight (lbs./kg.)	1.10kg (2.427lbs)
	Terminal	T2
	Protocol (optional)	SMBus/RS485/RS232
	SOC (optional)	LED




Different Rate Discharge Curve

Different Rate Discharge Curve @25°C

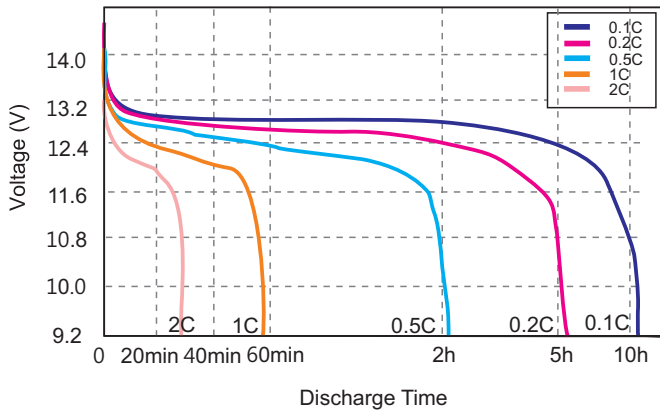


Different Temperature Discharge Curve

Different Temperature Discharge Curve @0.5C

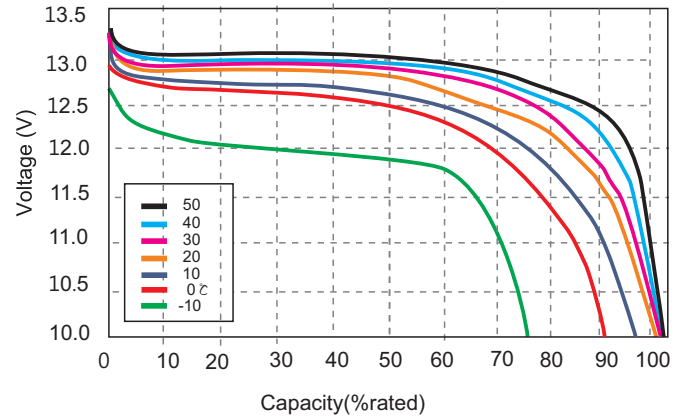


State of Charge Curve

State of Charge Curve @0.5C 25

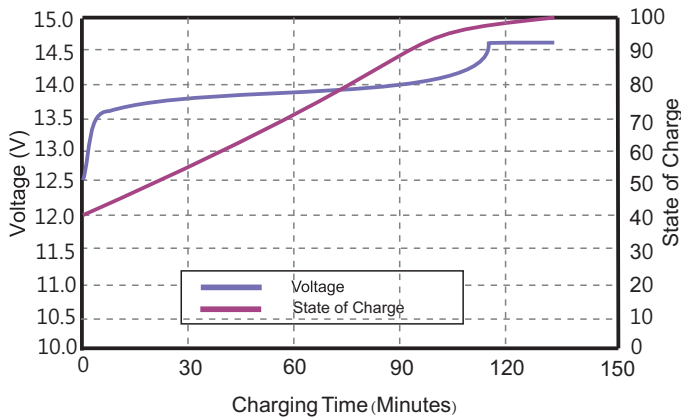


Charging Characteristics

Charging Characteristics @0.5C 25

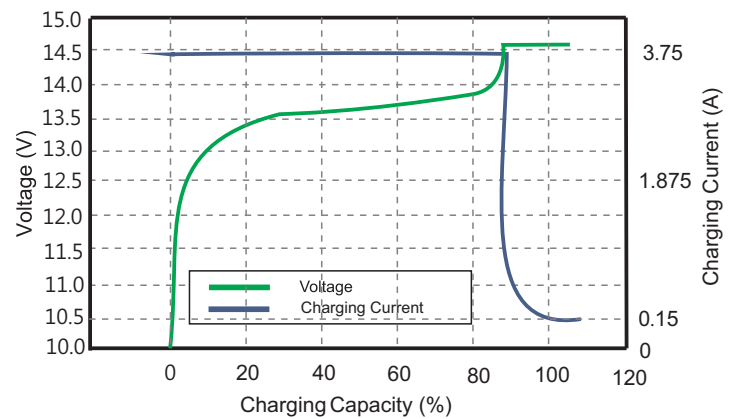


Cycle Life Curve

Different DOD Discharge Cycle Life Curve @1C

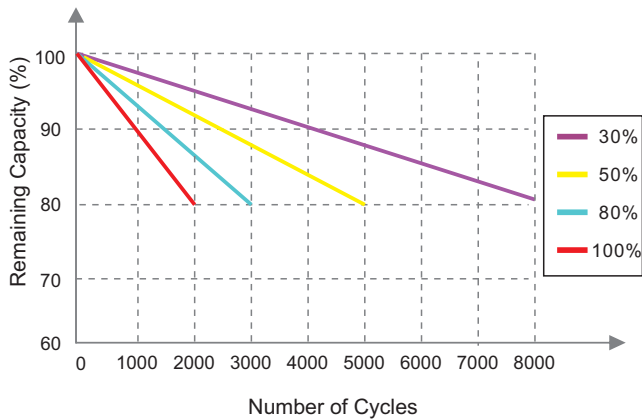

Self Discharge Characteristics Curve

Different Temperature Self Discharge Curve

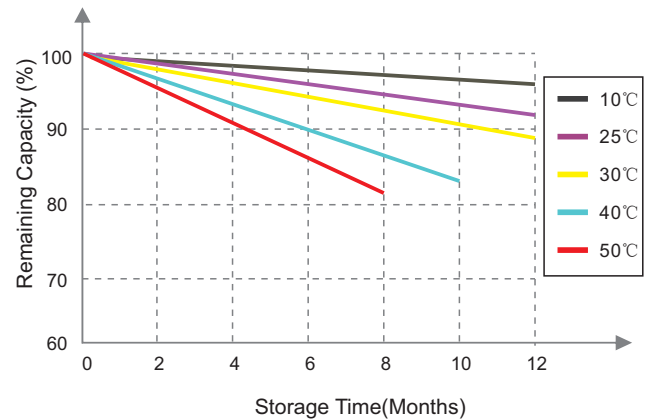

Haidi Energy Technology Co.,Ltd.

Sales Office: 408, Taibang Bldg., Hi-tech Industrial Park,
Nanshan District, Shenzhen, China
Tel: +86-755-8696 6894 Fax: +86-755-2889 2486
www.haidienergy.com E-mail: haidi@haidienergy.com

Factory Add: No.6, Yongfu Rd., Xuecheng District, Zaozhuang,
Shandong Province, China
Tel: +86-632-4423 6000 Fax: +86-632-4423 885